

KNOWLEDGE BASE · PUBLIC DOCUMENT

Docker volumes or bind mounts: where your data lives and how to back it up

Node.js, Python & Docker

CODE

RLX-MZ-KB-1121

VERSION

v2026.10.10

COUNTRY · LANGUAGE

Mozambique · English

MozOut Mozambique


RLX Holdings, S.A. · Group RLX Holdings

Tax ID (NUIT) 401 191 607 · Legal entity no. (NUEL) 105 045 974 · Economic activity code (CAE) 62022

<https://www.meu.mozout.co.mz/knowledgebase/1121>

Docker volumes or bind mounts: where your data lives and how to back it up

📁 Node.js, Python & Docker 📅 Created on **October 10, 2026** ⌚ 2 min read

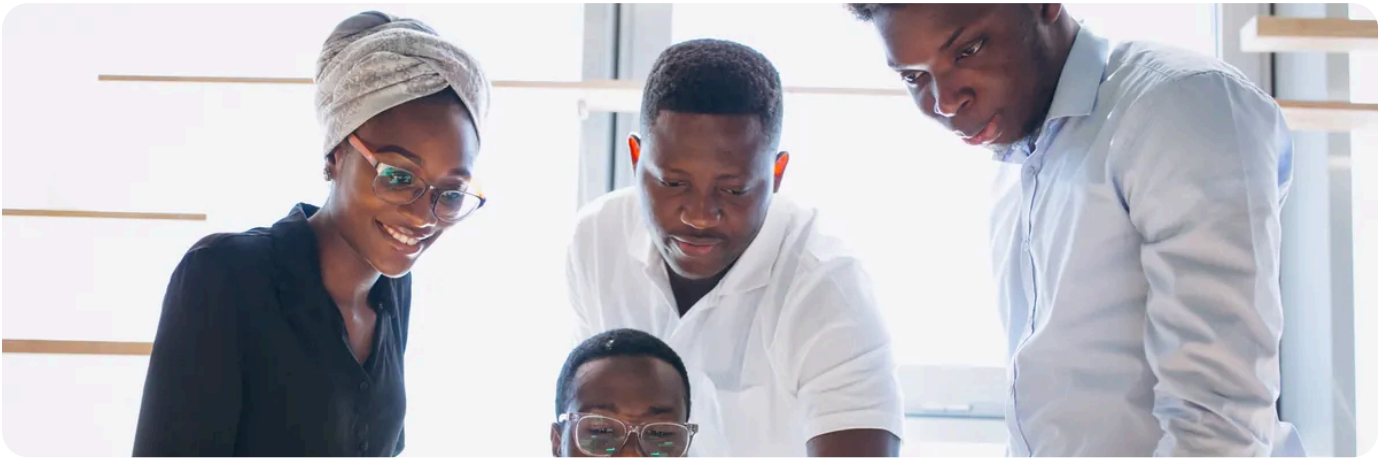

What a container writes inside itself disappears when it is deleted. For data to survive, you connect it to somewhere outside the container, in two ways: a **volume** (managed by Docker) or a **bind mount** (a server folder you choose). **The short answer:** for a database, use a volume; for code or configuration files you want to edit by hand on the server, a bind mount.

➞ Which to choose

	Volume	Bind mount
What it is	An area Docker manages (under <code>/var/lib/docker</code>).	A folder on the server, at the path you choose.
Written in Compose as	<code>db_data:/var/lib/postgresql/data</code>	<code>./config:/app/config</code>
Good for	Databases and application data.	Configuration and files you edit on the server.
The catch	You do not see it in a folder by hand; <code>down -v</code> deletes it.	File owners and permissions have to suit the container's user.

The full set-up of an application with its database is in **Docker Compose: an application with its database.**

Seeing where the data is, and making a copy

1 List the volumes and see where one is:

```
docker volume ls
docker volume inspect volume-name
```

Compose prefixes the project name to the volume name (`project_db_data`). That is the full name.

2 For a database, make a logical copy rather than copying the files while it runs: `pg_dump` or `mysqldump` inside the container. The files of a database that is writing can end up inconsistent. See **backing up with mysqldump and pg_dump**.

3 For other data, copy the volume to a file with a temporary container:

```
docker run --rm -v project_data:/data -v "$PWD":/backup alpine tar czf
/backup/data.tar.gz -C /data .
```

This creates `data.tar.gz` in the folder you are in. To restore, the same with `tar xzf` onto an empty volume.

4 Keep the copy off the server. A copy on the same disk does not protect you from the disk failing: **backing up a VPS**.

Watch the owners on a bind mount.

If the container runs as a user that does not own the server folder, writing fails with “permission denied” even though everything is “mounted”. Set the folder’s owner to the container’s user, instead of putting everything at 777. And `docker compose down -v` deletes the volumes, meaning the data: without `-v` it only removes the containers.

Give volumes clear names

in Compose and write down what each holds. Six months from now nobody remembers which volume is the database, and deleting the wrong one is the expensive mistake: **clearing the disk without losing data**.

RECOMMENDED

Need a server with room and backups for your containers? Have a look at our VPS plans.

 [See the VPS servers →](#)

SEE ALSO

Docker Compose: an application with its database



Updating a Docker application without losing data



Docker filling the disk: images, volumes and logs



MozOut Mozambique

RLX Holdings, S.A. · Group RLX Holdings

TAX ID (NUIT)	401 191 607
LEGAL ENTITY NO. (NUEL)	105 045 974
ECONOMIC ACTIVITY CODE (CAE)	62022
REGISTERED OFFICE	Bairro 7 de Setembro Vilankulo 1304 · CEP 0411-02, Inhambane, Mozambique
CONTACT	info@mozout.co.mz · +258 84 635 1111 · +258 86 635 1111 · www.mozout.co.mz
OPENING HOURS	Monday to Friday - 08 AM to 04 PM Saturday & Sunday - Closed

RLX-MZ-KB-1121 · v2026.10.10 · Generated on 21/10/2026 17:41



Online version of this document