

KNOWLEDGE BASE · PUBLIC DOCUMENT

How to install nginx on Ubuntu and serve your website from a folder

VPS & Servers

CODE

RLX-MZ-KB-1371

VERSION

v2026.10.10

COUNTRY · LANGUAGE

Mozambique · English

MozOut Mozambique


RLX Holdings, S.A. · Group RLX Holdings

Tax ID (NUIT) 401 191 607 · Legal entity no. (NUEL) 105 045 974 · Economic activity code (CAE) 62022

<https://www.meu.mozout.co.mz/knowledgebase/1371>

How to install nginx on Ubuntu and serve your website from a folder

 VPS & Servers  Created on **October 10, 2026**  3 min read

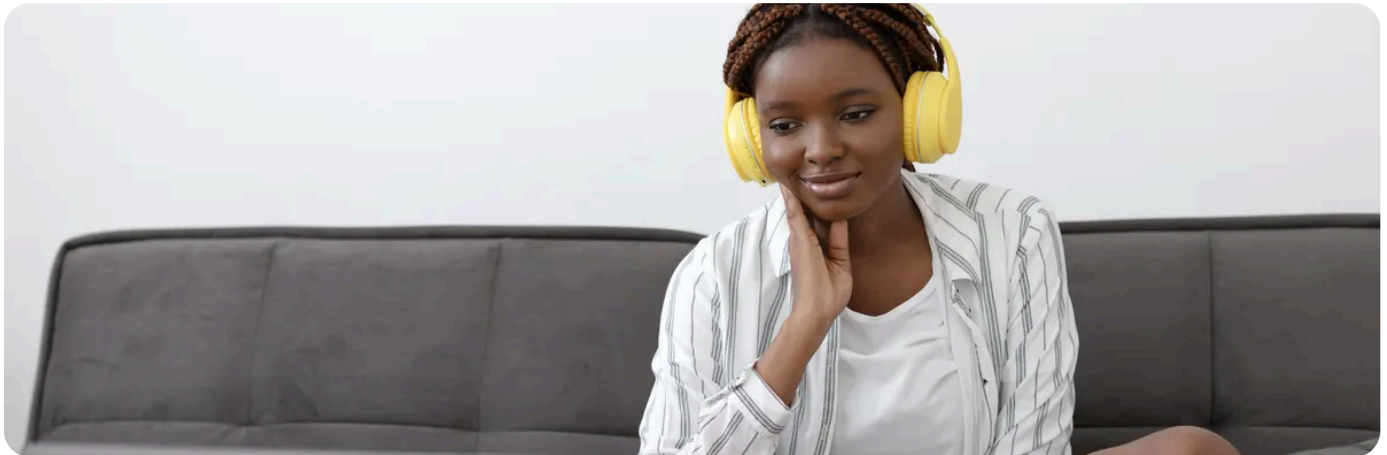

On an Ubuntu VPS, you install nginx with `sudo apt install nginx`, create a site file in `/etc/nginx/sites-available/` that points at your folder, enable it with a link in `sites-enabled`, check it with `sudo nginx -t` and reload. And the site opens. This article is for an unmanaged VPS with root access: what runs inside is yours, and our support does not install or repair nginx (see [how far our support goes](#)).

The commands below are for Debian and Ubuntu. On AlmaLinux or Rocky Linux the installer (`dnf`) and the configuration folder differ; the table further down has them. Depending on your system, always check against the distribution's own documentation.

Install it and get the site opening

- 1 Refresh the package list and install.** `sudo apt update` then `sudo apt install nginx`. The service starts on its own and is set to start at boot.
- 2 Open ports 80 and 443** if a firewall is active (on Ubuntu, `sudo ufw allow 80/tcp` and `sudo ufw allow 443/tcp`). Without it the site opens only from inside the server. See [ports and firewall on a VPS](#) and [setting up ufw without locking yourself out](#).
- 3 Put the site in a folder.** For example `/var/www/yourdomain.tld/public`, with a test `index.html` in it. Create it with `sudo mkdir -p /var/www/yourdomain.tld/public`.

- 4 Create the site file** with `sudo nano /etc/nginx/sites-available/yourdomain.tld` and this content:

```
server {
    listen 80;
    server_name yourdomain.tld www.yourdomain.tld;
    root /var/www/yourdomain.tld/public;
    index index.html index.php;

    location / {
        try_files $uri $uri/ =404;
    }
}
```

- 5 Enable it.** `sudo ln -s /etc/nginx/sites-available/yourdomain.tld /etc/nginx/sites-enabled/`. The `sites-enabled/default` link can stay or go; if the name in a request matches no `server_name`, the nginx welcome page is what answers.

- 6 Test the configuration before reloading.** `sudo nginx -t` must say “syntax is ok” and “test is successful”. Only then `sudo systemctl reload nginx`. A reload keeps open connections alive; a restart drops them.

- 7 Point the domain at the server.** The domain’s A record, and the one for `www`, must hold the VPS IP (see **where to find your VPS IP** and **pointing a domain at your own VPS**). To try it before DNS has spread, use the hosts file: **testing a site before you change the DNS**.

? If the site uses PHP

nginx does not run PHP itself: it hands it to PHP-FPM. Install it (on Ubuntu, `sudo apt install php-fpm`) and add to the `server` block a `location ~ \.php$` with `include snippets/fastcgi-php.conf`; and a `fastcgi_pass` pointing at PHP-FPM’s socket. The socket name carries the PHP version, so look at what exists with `ls /run/php/` instead of copying it from a guide. A “502 Bad Gateway” here is usually a socket with the wrong name or a stopped PHP-FPM.

? Debian and Ubuntu, or AlmaLinux and Rocky

	Debian and Ubuntu	AlmaLinux and Rocky Linux
Install	<code>apt install nginx</code>	<code>dnf install nginx</code> then <code>systemctl enable --now nginx</code>
Where sites live	<code>/etc/nginx/sites-available</code> and <code>sites-enabled</code>	<code>/etc/nginx/conf.d/name.conf</code>

	Debian and Ubuntu	AlmaLinux and Rocky Linux
Service user	<code>www-data</code>	<code>nginx</code>
Firewall	<code>ufw</code>	<code>firewalld: firewall-cmd --permanent --add-service=http</code>
Logs	<code>/var/log/nginx/access.log</code> and <code>error.log</code>	the same

**On AlmaLinux and Rocky, SELinux can block nginx**

without a word on the site: it will not read folders with the wrong label. If the file exists and the permissions are right but you still get a 403, see **when SELinux or AppArmor blocks a service**. And if the 403 is ordinary permissions, **file permissions on a VPS**.

**The first place to look is the error log:**

`Sudo tail -n 30 /var/log/nginx/error.log` . It nearly always says what is wrong (missing file, permission denied, missing socket).

NEED A HAND?

Server not answering even to a ping, or locked out by SSH after touching the firewall? That we can check from our side.

[📞 Open a support ticket →](#) **SEE ALSO**[Installing Apache and setting up a virtual host](#)[Several websites on one VPS](#)[Redirecting to HTTPS and to the bare domain](#)[Ports and firewall on a VPS](#)



MozOut Mozambique

RLX Holdings, S.A. · Group RLX Holdings

TAX ID (NUIT)	401 191 607
LEGAL ENTITY NO. (NUEL)	105 045 974
ECONOMIC ACTIVITY CODE (CAE)	62022
REGISTERED OFFICE	Bairro 7 de Setembro Vilankulo 1304 · CEP 0411-02, Inhambane, Mozambique
CONTACT	info@mozout.co.mz · +258 84 635 1111 · +258 86 635 1111 · www.mozout.co.mz
OPENING HOURS	Monday to Friday - 08 AM to 04 PM Saturday & Sunday - Closed



Online version of this document

RLX-MZ-KB-1371 · v2026.10.10 · Generated on 21/10/2026 17:42