

KNOWLEDGE BASE · PUBLIC DOCUMENT

Putting a CodeIgniter application on cPanel hosting

PHP & Development

CODE

RLX-MZ-KB-1453

VERSION

v2026.10.10

COUNTRY · LANGUAGE

Mozambique · English

MozOut Mozambique


RLX Holdings, S.A. · Group RLX Holdings

Tax ID (NUIT) 401 191 607 · Legal entity no. (NUEL) 105 045 974 · Economic activity code (CAE) 62022

<https://www.meu.mozout.co.mz/knowledgebase/1453>

Putting a CodeIgniter application on cPanel hosting

PHP & Development Created on **October 10, 2026** 3 min read

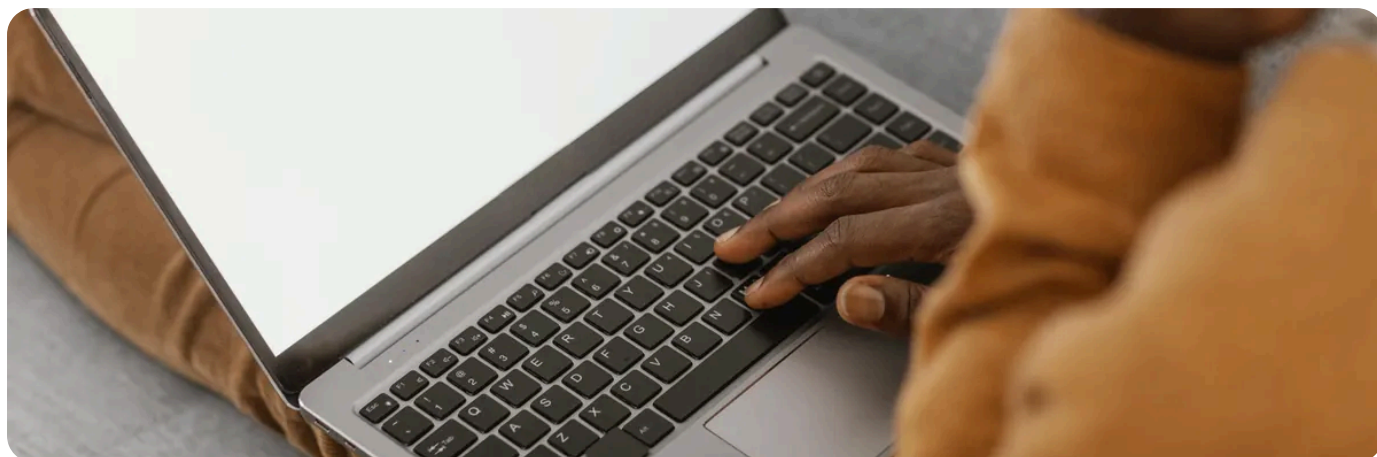

A **CodeIgniter** application runs well on cPanel hosting, as long as the domain points at the application's **public** folder and not at the project root. That is the one thing almost everybody gets wrong: the rest (the database, the **.env** file, the writable folders) is configuration. This article covers CodeIgniter 4, the current one; there is a note on 3 at the end.

CodeIgniter 4 separates what a visitor may request (the **public** folder) from what should never be requested (**app**, **system** and **writable**). If the domain points at the root, the site shows a folder listing or an error, and the worst case is leaving your configuration in plain view.

➞ From your computer to cPanel, step by step

- 1 Check the PHP version.** Each CodeIgniter 4 release states its minimum PHP version in the official documentation. Pick it in **Select PHP Version** for the site's folder: **which PHP version to use**.
- 2 Upload the project OUTSIDE the public folder.** For example to `/home/ACCOUNT/app-ci`, next to `public_html`. If you use Composer, run `composer install` there and upload the result: **Composer on shared hosting**.
- 3 Point the domain at the public folder.** With an addon domain or a subdomain you choose the folder when you create it: enter `/home/ACCOUNT/app-ci/public`. For the main domain, check in cPanel's domains screen whether it lets you change the folder; if not, use a subdomain for the application.
- 4 Create the .env file.** The project ships a template called `env`, without the dot. Copy it to `.env` in the project root and edit it (see the table below).
- 5 Create the database** and its user in cPanel, and put the details in `.env`: **creating databases and using phpMyAdmin**.

6 Make the writable folder writable. It is where the application keeps logs, sessions and cache. If it cannot write, the site errors on the very first request.

7 Create the tables with `php spark migrate` in the Terminal or over SSH, if the application ships migrations. Use the PHP version you chose: **running the right PHP on the command line**.

? What goes in .env

Line	What it is for
CI_ENVIRONMENT = production	Puts the application in production mode: errors stop showing to visitors. In <code>development</code> details appear that you must not expose.
app.baseURL = 'https://yourdomain.tld/'	The site address, with the trailing slash and in https. A wrong address breaks links and forms.
database.default.hostname	Usually <code>localhost</code> . Database and user names carry the account prefix.
database.default.database, .username, .password	The details you created in cPanel. The password lives here and never in the code.
database.default.DBDriver = MySQLi	The engine. For PostgreSQL the value is different, and the <code>pgsql</code> extension has to be switched on in Select PHP Version.

! The .env file must be out of the browser's reach.
With the domain pointing at the `public` folder, it is. If somebody pointed the domain at the project root, anyone can request `.env` and walk away with your passwords. Try opening that address: it must give 403 or 404. See **keeping passwords out of your code**.

! 404 on every page except the home page?
Friendly links need the rewrite rules in the `.htaccess` that comes inside the `public` folder. If it was not uploaded (names starting with a dot are hidden), the application only answers with `index.php` in the address. See **.htaccess for PHP projects**.

💡 CodeIgniter 3?
It is older and runs on older PHP versions. The practical difference: `index.php` sits in the project root, the configuration is in `application/config`, and the `system` folder should stay outside the public folder. The idea is the same: code is never within the browser's reach. If the site is old and nobody updates it, plan to replace it.

🔊 NEED A HAND?

Uploaded the application and all you see is an error? Send us the address and the last line of the log in writable/logs.

[📄 Open a support ticket →](#)**🔗 SEE ALSO**[Getting a Laravel application running →](#)[Keeping passwords out of your PHP code: .env files →](#)[Where the PHP error log is →](#)[Hosting plans and what each includes →](#)**mozout****MozOut Mozambique****RLX Holdings, S.A. · Group RLX Holdings**

TAX ID (NUIT)	401 191 607
LEGAL ENTITY NO. (NUEL)	105 045 974
ECONOMIC ACTIVITY CODE (CAE)	62022
REGISTERED OFFICE	Bairro 7 de Setembro Vilankulo 1304 · CEP 0411-02, Inhambane, Mozambique
CONTACT	info@mozout.co.mz · +258 84 635 1111 · +258 86 635 1111 · www.mozout.co.mz
OPENING HOURS	Monday to Friday - 08 AM to 04 PM Saturday & Sunday - Closed



Online version of this
document

RLX-MZ-KB-1453 · v2026.10.10 · Generated on 21/10/2026 17:42